

## FBF-1400-1850-60

1.4~1.85GHz, 60dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Pass Band Frequency:	1.4~1.85GHz
Pass Band Insertion Loss:	2dB max.
Pass Band Ripple:	1.2dB max
Stopband Attenuation:	60dB@DC~1300MHz min. 60dB@1950~3000MHz min.
VSWR:	1.5 max.
Power:	2W max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	110*52*11mm 4.331*2.047*0.433in
RF Connectors:	SMA female
Mounting:	4-M2.5 Through hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

### Outline Drawings

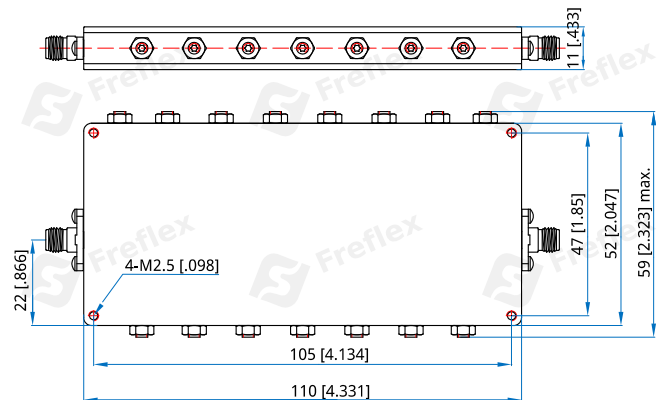

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FBF-1400-1850-60**

Customization is available upon request.