

FBF-150-350-50

0.15~0.35GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	0.15~0.35GHz
-1dB Passband Width:	250MHz min.
Passband Insertion Loss:	1.5dB max.
Passband Ripple:	1dB max.
Stopband Attenuation:	50dB@DC~125MHz min. 50dB@430~1000MHz min.
VSWR:	1.5 max.
Power:	1W max.

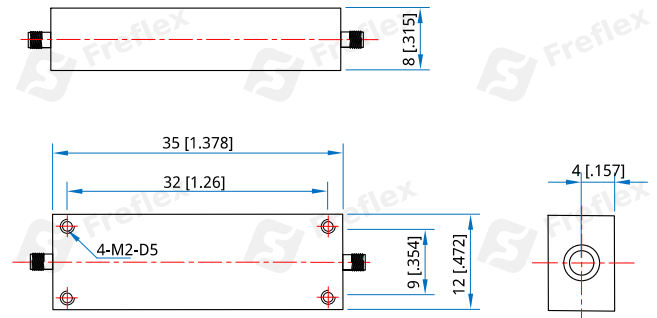
Mechanical

Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-150-350-50

Customization is available upon request.