

FBF-1500-1600-45

1.5~1.6GHz, 45dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	1.5~1.6GHz
-1dB Passband Width:	100MHz min.
Passband Insertion Loss:	3dB max.
Stopband Attenuation:	45dB@1.35GHz min. 45dB@1.75GHz min.
VSWR:	1.5 max.

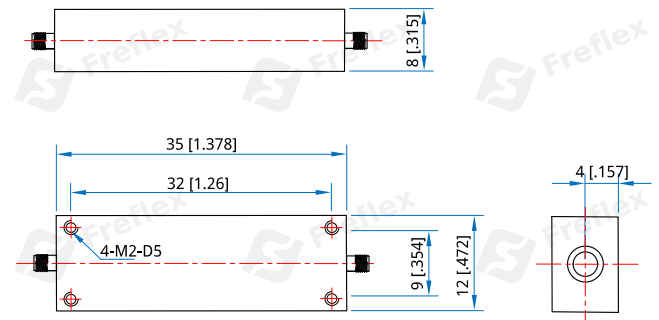
Mechanical

Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

FBF-1500-1600-45

Customization is available upon request.