

## FBF-19200-21200-80

19.2~21.2GHz, 80dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Pass Band Frequency:	19.2~21.2GHz
Center Frequency:	20.2GHz
Pass Band Insertion Loss:	1.0dB max.
Pass Band Ripple:	0.4dB max
Stopband Attenuation:	80dB@DC~18.2GHz min. 80dB@22.2~39GHz min.
VSWR:	1.15 max.
Power:	5W max.

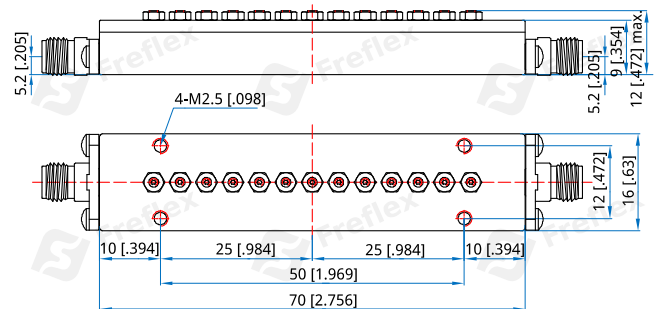
**Mechanical**

Size <sup>*1</sup> :	70*16*12mm 2.756*0.63*0.472in
RF Connectors:	SMA female
Mounting:	4-M2.5 Through hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-30~+70°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance:  $\pm 0.3$ mm [ $\pm 0.012$ in]

**How To Order**

**FBF-19200-21200-80**

Customization is available upon request.