

# FBF-2300-2400-55

2.3~2.4GHz, 55dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	2.3~2.4GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.22 max.
Passband Ripple:	1dB max.
Stopband Attenuation:	55dB @DC ~ 2.25GHz min. 55dB @2.45 ~ 5GHz min.
Impedance:	50Ω
Average Power:	+30dBm

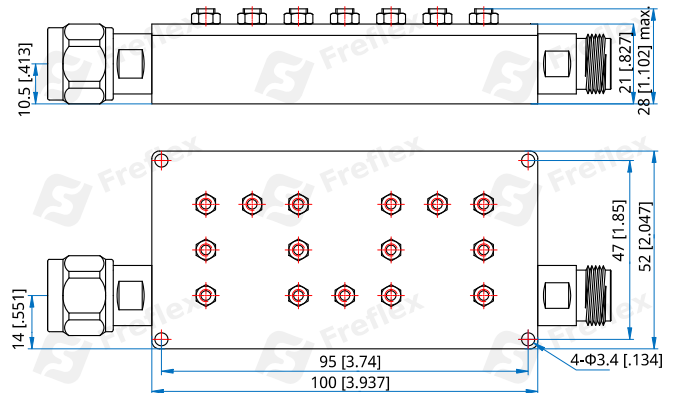
**Mechanical**

Size*1:	100*52*21mm 3.937*2.047*0.827in
Connectors:	N
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**FBF-2300-2400-55**

Customization is available upon request.