

FBF-245-355-25

0.245~0.355GHz, 25dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	0.245~0.355GHz
Passband Insertion Loss:	2dB max.
Passband Ripple:	1dB max.
VSWR:	1.5 max.
Stopband Attenuation:	38dB@DC~200MHz min. 25dB@400~900MHz min.
Impedance:	50Ω
Average Power:	1W max.

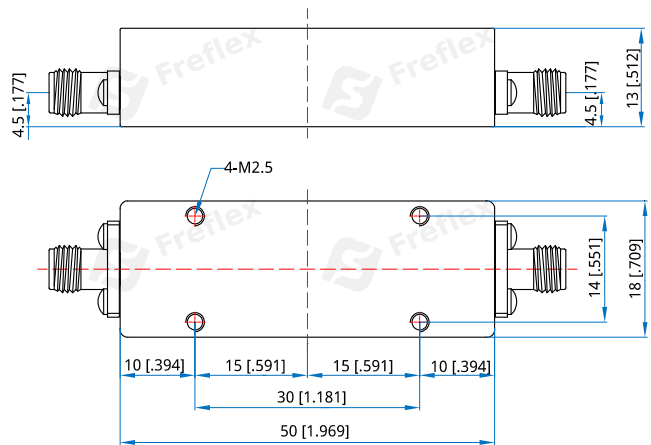
Mechanical

Size ^{*1} :	50*18*13mm 1.969*0.709*0.512in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-245-355-25

Customization is available upon request.