

# FBF-27500-31000-40

## 27.5~31GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

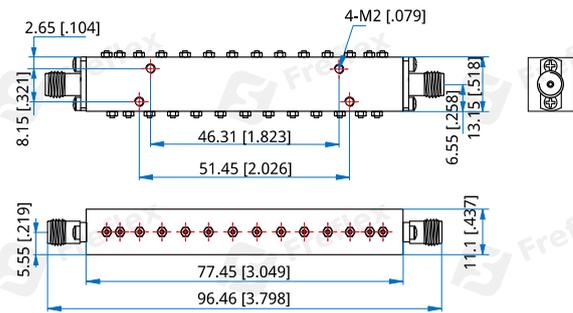
**Electrical**

Passband:	27.5~31GHz
Central Insertion Loss:	3dB max.
VSWR:	1.5 max.
Passband Ripple:	0.5dB max.
Stopband Attenuation:	40dB@27GHz
	40dB@31.5GHz
Impedance:	50Ω

**Mechanical**

Size*1:	77.45*11.1*13.15mm
	3.049*0.437*0.518in
Connectors:	2.92mm Female (Removable)
Mounting:	4-M2mm through-hole

[1] Exclude connectors.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**FBF-27500-31000-40**

Customization is available upon request.