

FBF-27800-28200-30

27.8~28.2GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	27.8~28.2GHz
Passband Insertion Loss:	1.3dB max.
VSWR:	1.3 max.
Stopband Attenuation:	30dB min. @27.5&28.5GHz 60dB min. @25GHz
Impedance:	50Ω
Average Power:	1W max.

Mechanical


Size ^{*1} :	80*17*11mm 3.15*0.669*0.433in
Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

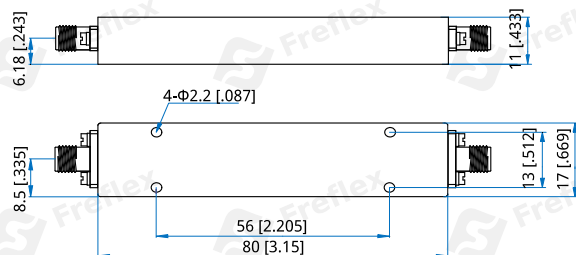

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-27800-28200-30

Customization is available upon request.