

# FBF-350-370-55

## 350~370MHz, 55dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	350~370MHz
-3dB Passband Width:	20MHz min.
Passband Insertion Loss:	3dB max.
Stopband Attenuation:	55dB@300MHz min. 55dB@420MHz min.
VSWR:	2 max.
Power:	5W max.

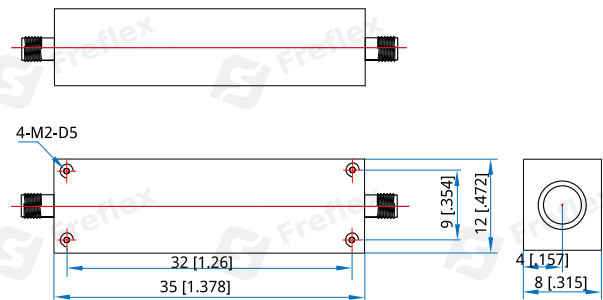
**Mechanical**

Size <sup>*1</sup> :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

**How To Order**

**FBF-350-370-55**

Customization is available upon request.