

FBF-430-450-30

0.43~0.45GHz, 30dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical

Passband:	0.43~0.45GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.22 max.
Stopband Attenuation:	30dB@DC~425MHz min. 30dB@455~1000MHz min.
Impedance:	50Ω
Average Power:	20W max.

Mechanical


Size ^{*1} :	181*93*65mm 7.126*3.661*2.559in
Connectors:	SMA Female
Mounting:	4-M4, depth 8mm

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

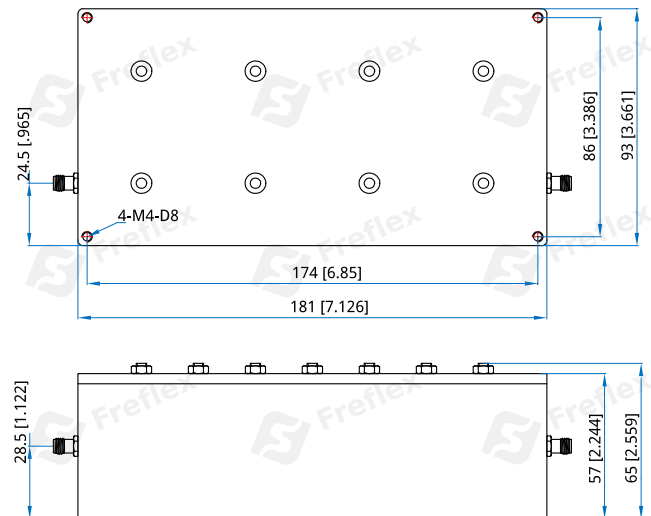

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-430-450-30

Customization is available upon request.