

FBF-500-950-50

0.5~0.95GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	0.5~0.95GHz
Passband Ripple:	1dB max.
Insertion Loss:	1.5dB max.
Stopband Attenuation:	50dB@400MHz min. 50dB@1150MHz min.
VSWR:	1.6 max.

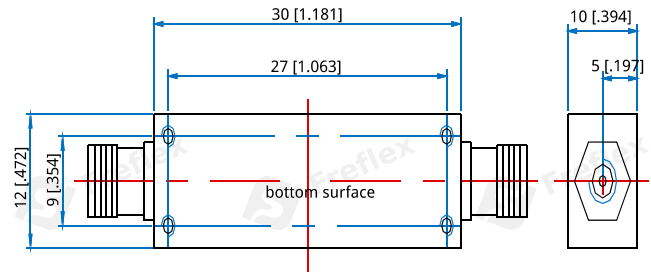
Mechanical

Size ^{*1} :	30*12*10mm 1.181*0.472*0.394in
RF Connectors:	SMA female
Mounting:	4-M2mm (H=5)

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-500-950-50

Customization is available upon request.