

FBF-5662.5-5663.5-13

5.6625~5.6635GHz, 13dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|--------------------------|--|
| Passband: | 5.6625~5.6635GHz |
| Passband Insertion Loss: | 2.2dB max. |
| Passband Ripple: | 0.3dB max. |
| VSWR: | 1.3 max. |
| Stopband Attenuation: | 13dB@DC~5.653GHz min. 13dB@5.673~10GHz min. |
| Impedance: | 50Ω |
| Average Power: | 5W max. |

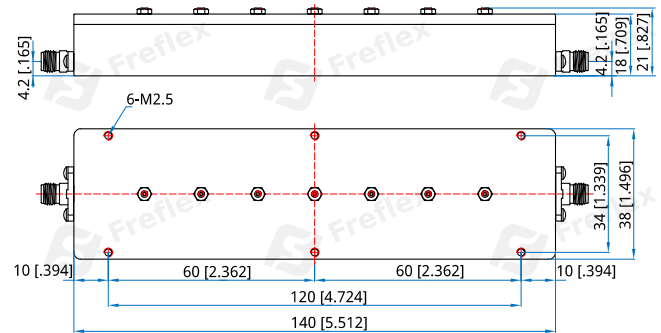
Mechanical

| | |
|----------------------|------------------------------------|
| Size ^{*1} : | 140*38*18mm 5.512*1.496*0.709in |
| Connectors: | SMA Female |
| Mounting: | 6-M2.5 through hole |

[1] Exclude connectors.

Environmental

| | |
|--------------|-----------|
| Temperature: | +10~+30°C |
|--------------|-----------|

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-5662.5-5663.5-13

Customization is available upon request.