

FBF-5672.5-5673.5-13

5.6725~5.6735GHz, 13dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	5.6725~5.6735GHz
Passband Insertion Loss:	2.2dB max.
Passband Ripple:	0.3dB max.
VSWR:	1.3 max.
Stopband Attenuation:	13dB@DC~5.663GHz min. 13dB@5.683~10GHz min.
Impedance:	50Ω
Average Power:	5W max.

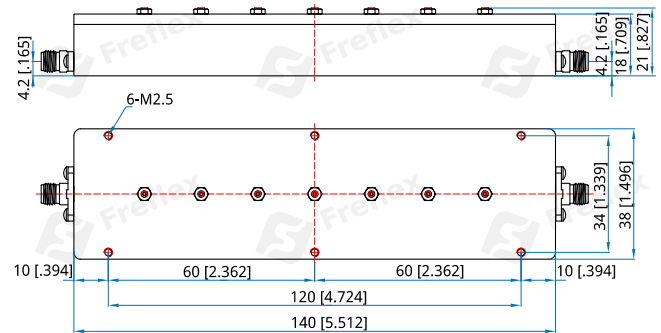
Mechanical

Size ^{*1} :	140*38*18mm 5.512*1.496*0.709in
Connectors:	SMA Female
Mounting:	6-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	+10~+30°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-5672.5-5673.5-13

Customization is available upon request.