

# FBF-606-678-40

## 0.606~0.678GHz, 40dBc

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	0.606~0.678GHz
Passband Insertion Loss:	1.5dB max.
Passband Ripple:	1dB max.
VSWR:	1.5 max.
Stopband Attenuation:	40dBc@DC~500MHz min. 30dBc@825~3000MHz min.
Impedance:	50Ω
Average Power:	10W

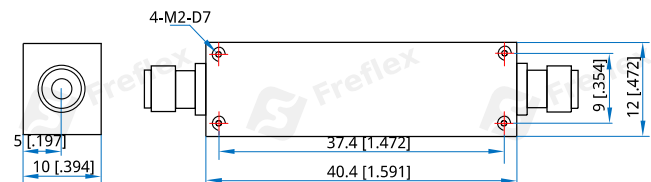
**Mechanical**

Size <sup>*1</sup> :	40.4*12*10mm 1.591*0.472*0.394in
Connectors:	SMA Female
Mounting:	4-M2 depth 7mm

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**FBF-606-678-40**

Customization is available upon request.