

# FBF-710-730-65

0.71~0.73GHz

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	0.71~0.73GHz
Passband Insertion Loss:	2dB max.
Passband Flatness:	0.4dB max.
VSWR:	1.4 max.
Stopband Attenuation:	65dB@DC~650MHz min. 65dB@790~1500MHz min.
Impedance:	50Ω
Average Power:	10W max.

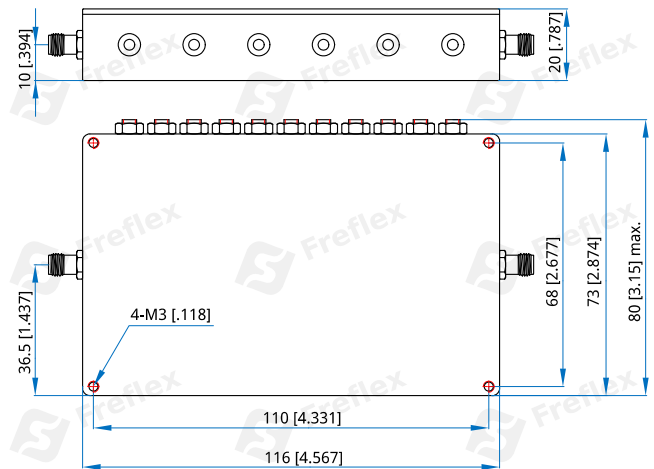
**Mechanical**

Size <sup>*1</sup> :	116*80*20mm 4.567*3.15*0.787in
RF Connectors:	SMA Female
Mounting:	4-M3mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-30~+70°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**FBF-710-730-65**

Customization is available upon request.