

FBF-818-918-45

0.818~0.918GHz, 45dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|--------------------------|---------------------------------------|
| Frequency: | 0.818~0.918GHz |
| -1dB Passband Width: | 100MHz min. |
| Passband Insertion Loss: | 3dB max. |
| Stopband Attenuation: | 45dB@668MHz min. 45dB@1068MHz min. |
| VSWR: | 1.5 max. |

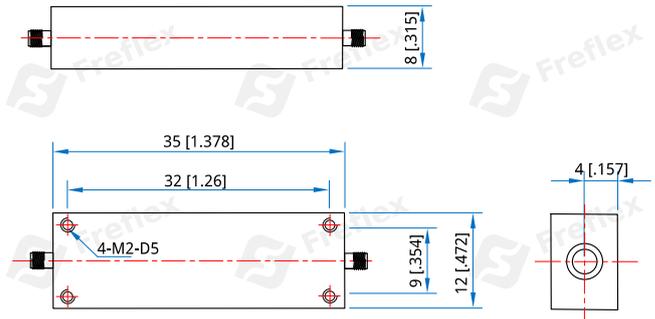
Mechanical

| | |
|----------------------|----------------------------------|
| Size ^{*1} : | 35*12*8mm 1.378*0.472*0.315in |
| RF Connectors: | SMA female |
| Mounting: | 4-M2 depth 5mm |

[1] Exclude connectors.

Environmental

| | |
|----------------------------|-----------|
| Operating Temperature: | -40~+70°C |
| Non-operating Temperature: | -55~+85°C |

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-818-918-45

Customization is available upon request.