

FBF-860-880-60

0.86~0.88GHz, 60dBc

Features: * High Stopband Rejection * Small Size	Applications: * Telecom * Laboratory Test * Receivers * Instrumentation
---	--

Electrical

Frequency:	0.86~0.88GHz
Passband Width:	20~25MHz
Passband Insertion Loss:	1.5dB max.
Stopband Attenuation:	60dBc@DC~837.5MHz min. 60dBc@902.5~2000MHz min.
VSWR:	1.5 max.

Mechanical


Size ^{*1} :	97*67*40mm 3.819*2.638*1.575in
RF Connectors:	SMA Female
Mounting:	4-Φ3.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

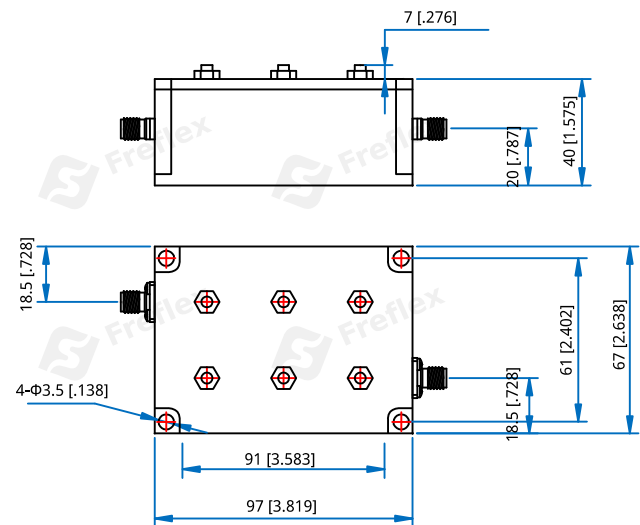

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-860-880-60

Customization is available upon request.