

## FBF-87-108-40

0.087~0.108GHz, 40dBc

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	0.087~0.108GHz
Passband Insertion Loss:	3.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	40dBc@72MHz min. 40dBc@123MHz min.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	25*10*7mm 0.984*0.394*0.276in
Connectors:	Φ0.38 PIN
Mounting:	4-M1.6 through hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

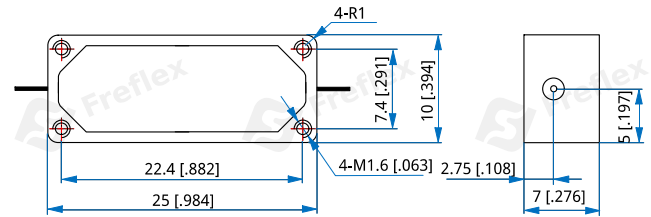

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FBF-87-108-40**

Customization is available upon request.