

# FBF-880-915-45

## 0.88~0.915GHz, 45dB

Features:  
 \* High Stopband Rejection  
 \* Small Size

Applications:  
 \* Telecom  
 \* Laboratory Test  
 \* Receivers  
 \* Instrumentation

### Electrical

Passband:	0.88~0.915GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.25 max.
Passband Ripple:	1dB max.
Stopband Attenuation:	45dB @DC ~ 0.87GHz, 0.925 ~ 3GHz min.
Impedance:	50Ω
Average Power:	20W max.

### Mechanical


Size*1:	120*62*41mm 4.724*2.441*1.614in
Connectors:	N
Mounting:	4-M3 depth 8mm

[1] Exclude connectors.

### Environmental

Temperature:	-30~+70°C
--------------	-----------

### Outline Drawings

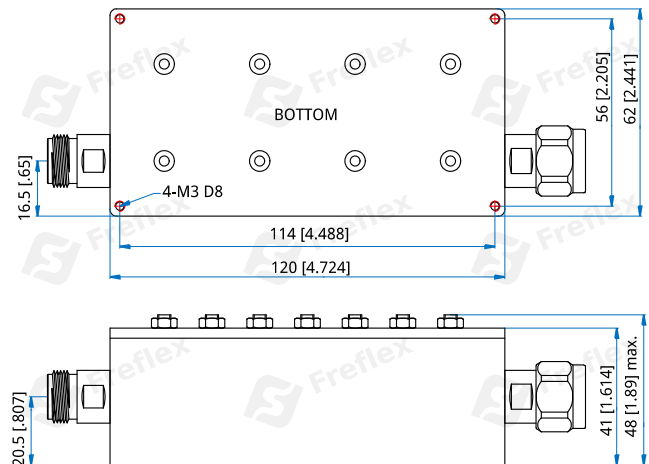

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

### How To Order

**FBF-880-915-45**

Customization is available upon request.