

# FBF-920-940-60

## 0.92~0.94GHz, 60dBc

<b>Features:</b>	<b>Applications:</b>
* High Stopband Rejection	* Telecom
* Small Size	* Laboratory Test
	* Receivers
	* Instrumentation

### Electrical

Frequency:	0.92~0.94GHz
Passband Width:	20~25MHz
Passband Insertion Loss:	1.5dB max.
Stopband Attenuation:	60dBc@DC~897.5MHz min. 60dBc@962.5~2000MHz min.
VSWR:	1.5 max.

### Mechanical


Size <sup>*1</sup> :	97*67*40mm 3.819*2.638*1.575in
RF Connectors:	SMA Female
Mounting:	4-Φ3.5mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

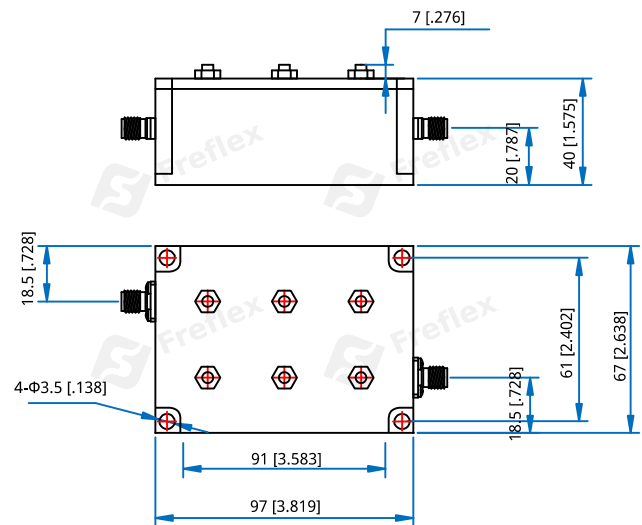

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

#### FBF-920-940-60

Customization is available upon request.