

FBF-95-105-55

95~105MHz, 55dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	95~105MHz
-3dB Passband Width:	10MHz min.
Passband Insertion Loss:	3dB max.
Stopband Attenuation:	55dB@50MHz min. 55dB@150MHz min.
VSWR:	2 max.
Power:	5W max.

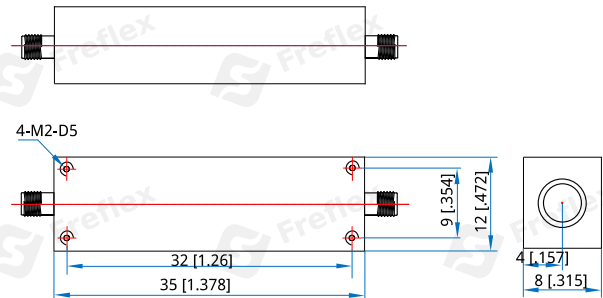
Mechanical

Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

How To Order

FBF-95-105-55

Customization is available upon request.