

FBF-9890-9910-45

9.89~9.91GHz, 45dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	9.89~9.91GHz
3dB Bandwidth:	20MHz max.
Insertion Loss:	2dB max. @9.9GHz
Return Loss:	18dB min. @9.9GHz
Stopband Attenuation:	45dB@DC~9.83GHz min. 45dB@9.97~13GHz min.
Impedance:	50Ω
Average Power:	5W max.

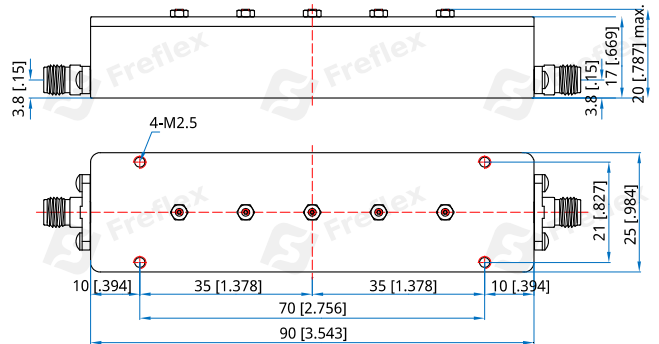
Mechanical

Size ^{*1} :	90*25*17mm 3.543*0.984*0.669in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	+15~+30°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FBF-9890-9910-45

Customization is available upon request.