

# FRF-1710-1785-40-1

## 1.71~1.785GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~1.695GHz 1.8~5.1GHz
Passband Insertion Loss:	3dB max.
Passband VSWR:	1.5 max.
Stopband:	1.71~1.785GHz
Stopband Attenuation:	40dB min.
Average Power:	20W max.
Impedance:	50Ω

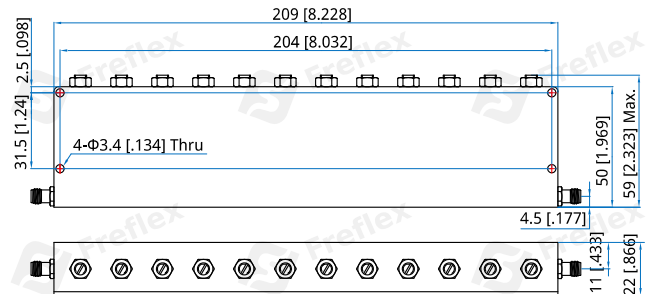
**Mechanical**

Size <sup>*1</sup> :	209*50*22mm 8.228*1.969*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-10~+50°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

**How To Order**

**FRF-1710-1785-40-1**

Customization is available upon request.