

# FRF-1710-1785-40

1.71~1.785GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

## Electrical


Passband:	DC~1.685GHz
	1.81~4.5GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband:	1.71~1.785GHz
Stopband Attenuation:	40dB min.
Average Power:	50W max.
Impedance:	50Ω

## Mechanical

Size <sup>*1</sup> :	225*46*22mm
	8.858*1.811*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

## Outline Drawings

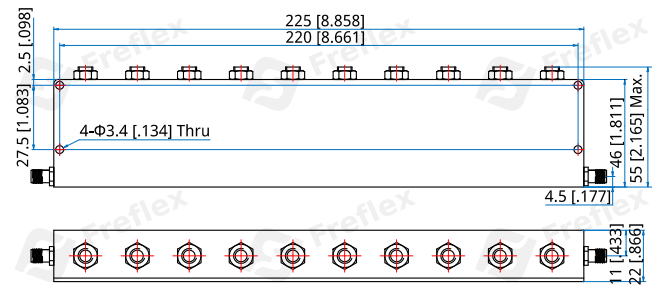

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

## How To Order

**FRF-1710-1785-40**

Customization is available upon request.