

FRF-1880-1920-50

1.88~1.92GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.86GHz 1.94~5.8GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband:	1.88~1.92GHz
Stopband Attenuation:	50dB min.
Average Power:	50W max.
Impedance:	50Ω

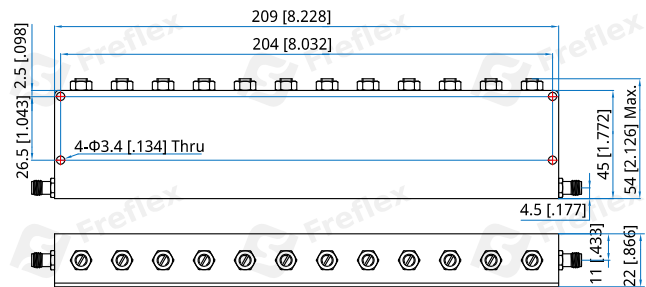
Mechanical

Size ^{*1} :	209*45*22mm 8.228*1.772*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-1880-1920-50

Customization is available upon request.