

FRF-1920-1980-35

1.92~1.98GHz, 35dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.91GHz 1.99~6GHz
Passband Insertion Loss:	2.0dB max. @DC~1.905GHz, 1.995~6GHz 3dB max. @1.905~1.91GHz, 1.99~1.995GHz
Passband VSWR:	1.5 max.
Stopband:	1.92~1.98GHz
Stopband Attenuation:	35dB min.
Average Power:	50W max.
Impedance:	50Ω

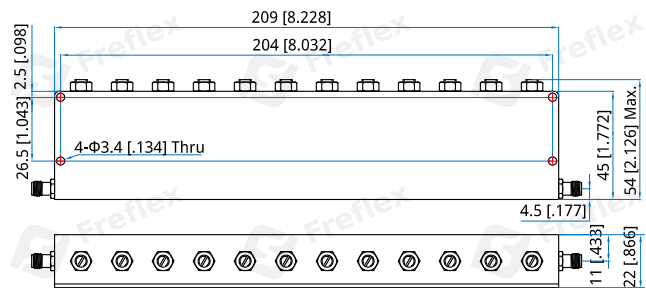
Mechanical

Size ^{*1} :	209*45*22mm 8.228*1.772*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+40°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-1920-1980-35

Customization is available upon request.