

FRF-2010-2025-60

2.01~2.025GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|--------------------------|--|
| Passband: | DC~2GHz 2.035~6GHz |
| Passband Insertion Loss: | 3dB max. @DC~2GHz, 2.037~6GHz 4dB max. @2.035~2.037GHz |
| Passband VSWR: | 1.5 max. |
| Stopband: | 2.01~2.025GHz |
| Stopband Attenuation: | 60dB min. |
| Average Power: | 20W max. |
| Impedance: | 50Ω |

Mechanical


| | |
|----------------------|-----------------------------------|
| Size ^{*1} : | 245*47*22mm 9.646*1.85*0.866in |
| RF Connectors: | SMA Female |
| Mounting: | 4-Φ3.4mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|--------------|-----------|
| Temperature: | -10~+50°C |
|--------------|-----------|

Outline Drawings

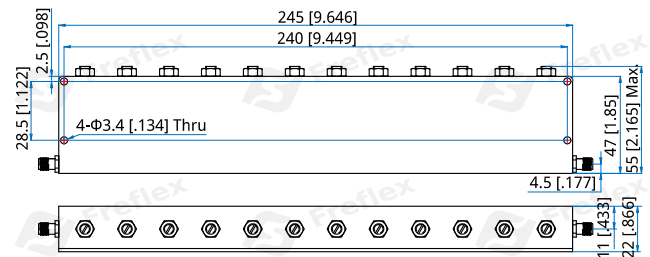

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-2010-2025-60

Customization is available upon request.