

## FRF-2300-2675-50

2.3~2.675GHz, 50dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	DC~2.2GHz 2.775~6.2GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max. @0.75~2.2GHz 1.5 max. @2.775~5.6GHz 1.8 max. @DC~0.75GHz 1.8 max. @5.6~6.2GHz
Stopband:	2.3~2.675GHz
Stopband Attenuation:	50dB min.
Average Power:	10W max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	209*42*22mm 8.228*1.654*0.866in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

### Environmental

Temperature:	-30~+70°C
--------------	-----------

### Outline Drawings

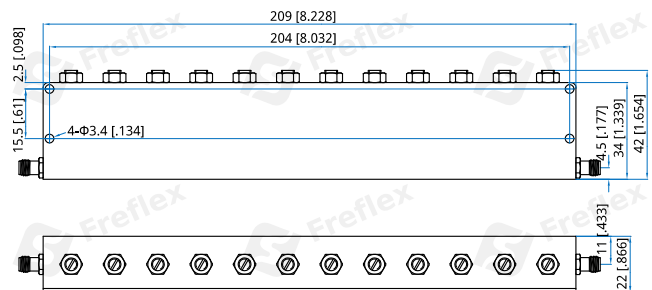

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

### How To Order

**FRF-2300-2675-50**

Customization is available upon request.