

# FRF-2400-2483.5-50

## 2.4~2.4835GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~2.375GHz 2.51~7.3GHz
Passband Insertion Loss:	1.0dB max. @DC~2.345GHz, 2.54~7.3GHz 2.5dB max. @2.345~2.375GHz, 2.51~2.54GHz
Passband VSWR:	1.5 max.
Stopband:	2.4~2.4835GHz
Stopband Attenuation:	50dB min.
Average Power:	20W max.
Impedance:	50Ω

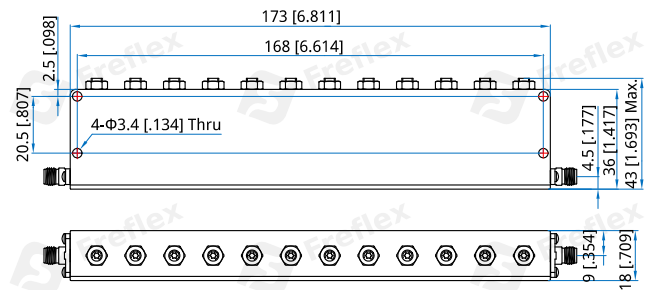
**Mechanical**

Size <sup>*1</sup> :	173*36*18mm 6.811*1.417*0.709in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	0~+40°C
--------------	---------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

**How To Order**

**FRF-2400-2483.5-50**

Customization is available upon request.