

FRF-2400-2500-50

2.4~2.5GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2.35GHz
	2.55~5.5GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max.
Stopband:	2.4~2.5GHz
Stopband Attenuation:	50dB min.
Average Power:	30W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	22*38*209mm
	0.866*1.496*8.228in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

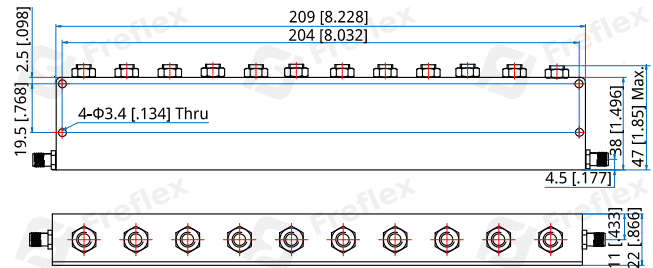

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

FRF-2400-2500-50

Customization is available upon request.