

FRF-2575-2625-60

2575~2625MHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2550MHz 2650~7700MHz
Passband Insertion Loss:	1dB max. @DC~2520MHz, 2680~7700MHz 2dB max. @2520~2550MHz, 2650~2680MHz
VSWR:	1.5 max.
Stopband:	2575~2625MHz
Stopband Attenuation:	60dB min.
Average Power:	30W max.

Mechanical


Size*1:	173*42*18mm 6.811*1.654*0.709in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -20~+60°C

Outline Drawings

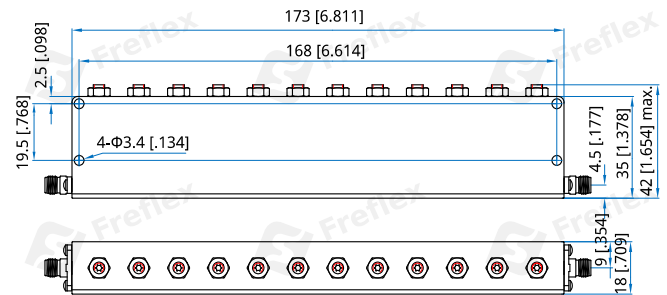

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

FRF-2575-2625-60

Customization is available upon request.