

FRF-2620-2690-60

2.62~2.69GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2.57GHz 2.74~10GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	2 max.
Stopband:	2.62~2.69GHz
Stopband Attenuation:	60dB min.
Average Power:	50W max.
Impedance:	50Ω

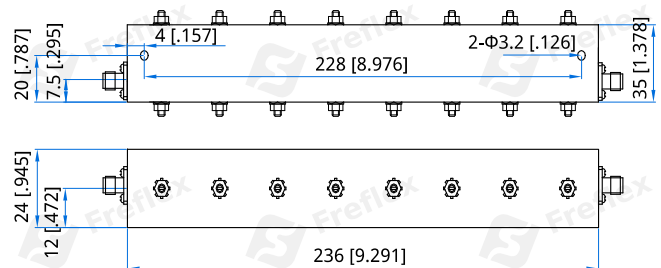
Mechanical

Size ^{*1} :	236*35*24mm 9.291*1.378*0.945in
RF Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+55°C
--------------	---------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

FRF-2620-2690-60

Customization is available upon request.