

FRF-3098-3402-60

3.098~3.402MHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2.943GHz 3.557~7.7GHz
Passband Insertion Loss*1:	1.5dB max.
Passband VSWR:	1.7 max.
Stopband:	3.098~3.402GHz
Stopband Attenuation:	60dB min.
Average Power:	10W max.
Impedance:	50Ω

[1] At the corner: 2.0dB max.

Mechanical


Size*2:	173*42*11mm 6.811*1.654*0.433in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[2] Exclude connectors.

Environmental

Temperature:	0~+40°C
--------------	---------

Outline Drawings

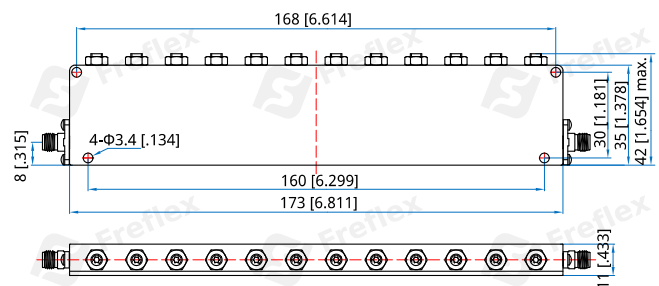

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

FRF-3098-3402-60

Customization is available upon request.