

FRF-3300-3800-50

3.3~3.8GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~3.19GHz 3.925~8.5GHz
Passband Insertion Loss:	1.2dB max.
Passband VSWR:	1.7 max.
Stopband:	3.3~3.8GHz
Stopband Attenuation:	50dB min.
Average Power:	5W
Impedance:	50Ω

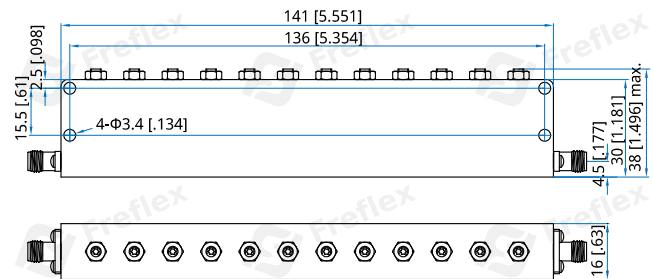
Mechanical

Size ^{*1} :	141*30*16mm 5.551*1.181*0.63in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-3300-3800-50

Customization is available upon request.