

FRF-3420-3700-60

3.42~3.7GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~3.27GHz 3.85~8.5GHz
Passband Insertion Loss:	1.2dB max.
Passband VSWR:	1.7 max.
Stopband:	3.42~3.7GHz
Stopband Attenuation:	60dB min.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	141*30*16mm 5.551*1.181*0.63in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

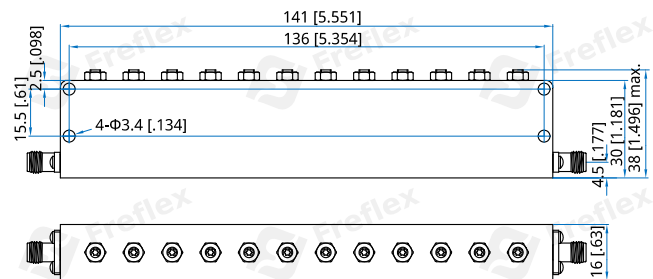

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-3420-3700-60

Customization is available upon request.