

FRF-430-438-60

0.43~0.438GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~0.34GHz 0.55~1GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.8 max.
Stopband:	0.43~0.438GHz
Stopband Attenuation:	60dB min.
Average Power:	1W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	30*18*13mm 1.181*0.709*0.512in
Weight:	20g
RF Connectors:	SMA female SMA male
Mounting:	4-M2.5mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

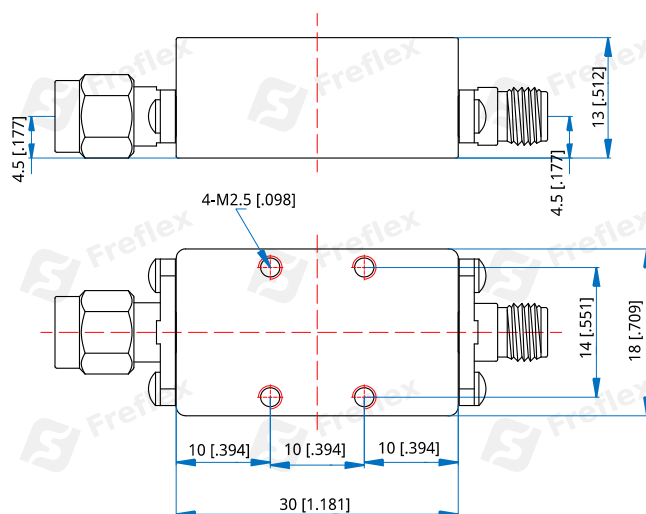

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FRF-430-438-60

Customization is available upon request.