

FRF-4400-5000-50

4.4~5GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~4.22GHz 5.15~10GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.7 max.
Stopband:	4.4~5GHz
Stopband Attenuation:	50dB min.
Average Power:	5W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	141*26*16mm 5.551*1.024*0.63in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

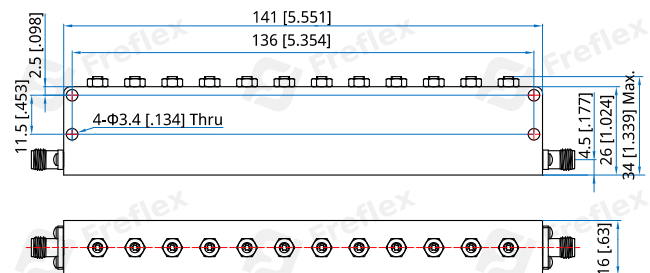

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-4400-5000-50

Customization is available upon request.