

FRF-5150-5350-50

5.15~5.35GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~5.05GHz
	5.45~11GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.6 max.
Stopband:	5.15~5.35GHz
Stopband Attenuation:	50dB min.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	141*25*16mm
	5.551*0.984*0.63in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

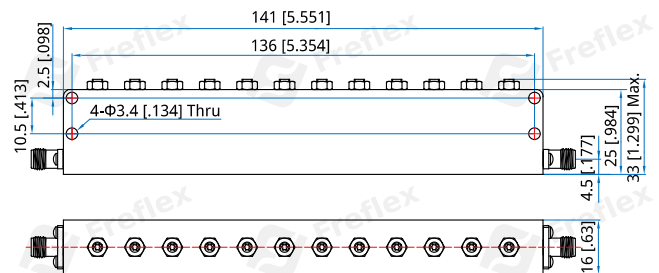

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-5150-5350-50

Customization is available upon request.