

FRF-5150-5850-50

5.15~5.85GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~4.95GHz 6.05~11.5GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.7 max.
Stopband:	5.15~5.85GHz
Stopband Attenuation:	50dB min.
Average Power:	5W max.
Impedance:	50Ω

Mechanical


Size*1:	141*36*18mm 5.551*1.417*0.709in
Input Connector:	N Male/N Female
Mounting:	2-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

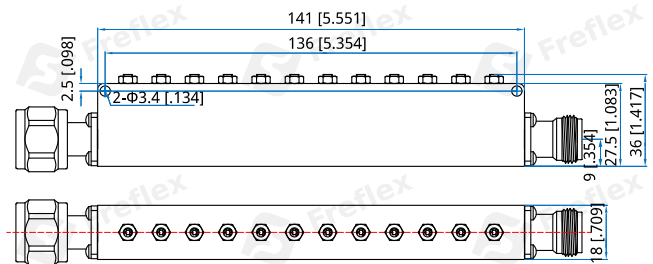

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

FRF-5150-5850-50

Customization is available upon request.