

FRF-5925-7125-50-1

5.925~7.125GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~5.55GHz 7.5~14.5GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.7 max.
Stopband:	5.925~7.125GHz
Stopband Attenuation:	50dB min.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	141*20*16mm 5.551*0.787*0.63in
Weight:	115g
RF Connectors:	SMA female
Mounting:	2-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	+10~+30°C
--------------	-----------

Outline Drawings

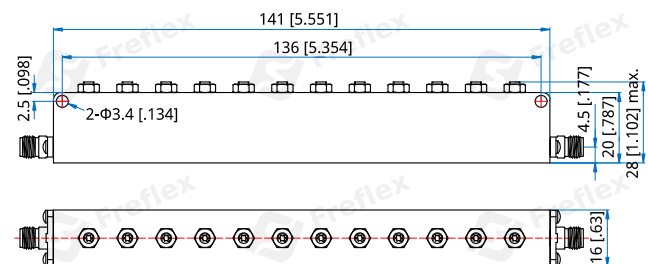

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

FRF-5925-7125-50-1

Customization is available upon request.