

FRF-6425-6525-50

6.425~6.525GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~6.3GHz
	6.65~14GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.7 max.
Stopband:	6.425~6.525GHz
Stopband Attenuation:	50dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	141*30*16mm
	5.551*1.181*0.63in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

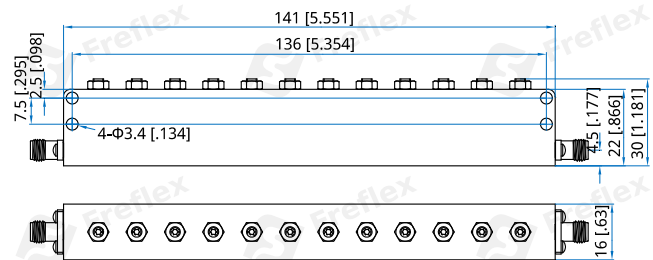

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

FRF-6425-6525-50

Customization is available upon request.