

FRF-703-748-40

0.703~0.748GHz, 40dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical

Passband: DC~0.683GHz
 0.768~2GHz
 Passband Insertion Loss: 1.5dB max.
 Passband VSWR: 1.5 max.
 Stopband: 0.703~0.748GHz
 Stopband Attenuation: 40dB min.
 Average Power: 10W max.
 Impedance: 50Ω

Mechanical


Size*1: 265*91*28mm
 10.433*3.583*1.102in
 RF Connectors: SMA Female
 Mounting: 4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature: -20~+60°C

Outline Drawings

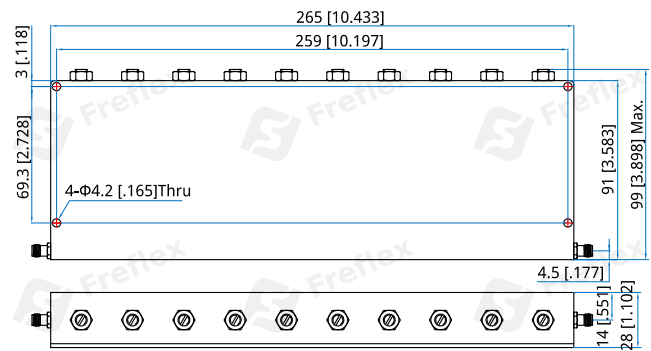

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-703-748-40

Customization is available upon request.