

FRF-791-821-60

0.791~0.821GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~0.771GHz 0.854~2.4GHz
Passband Insertion Loss:	1.2dB max.
Passband VSWR:	1.5 max. @DC~0.771GHz, 0.854~2.25GHz 1.7 max. @2.25~2.4GHz
Stopband:	0.791~0.821GHz
Stopband Attenuation:	60dB min.
Average Power:	10W max.
Impedance:	50Ω

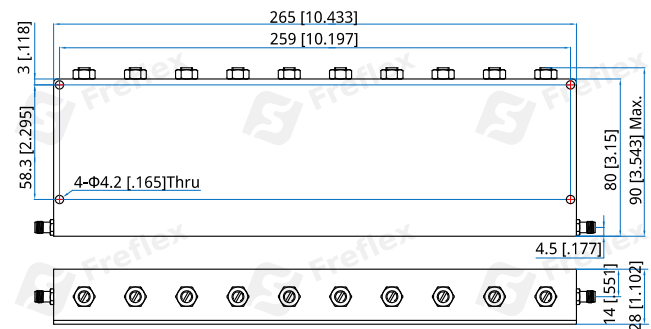
Mechanical

Size ^{*1} :	265*80*28mm 10.433*3.15*1.102in
RF Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+40°C
--------------	---------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-791-821-60

Customization is available upon request.