

FRF-824-849-40

0.824~0.849GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~0.809GHz 0.864~2.55GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max. @DC~0.809GHz, 0.864~2.3GHz 1.7 max. @2.3~2.55GHz
Stopband:	0.824~0.849GHz
Stopband Attenuation:	40dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	265*85*28mm 10.433*3.346*1.102in
RF Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings

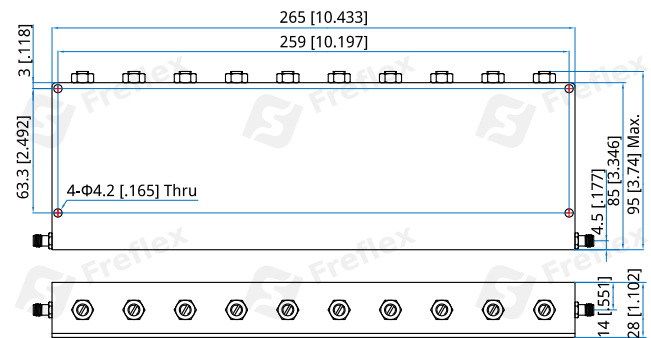

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

FRF-824-849-40

Customization is available upon request.