

FRF-832-862-40

0.832~0.862GHz, 40dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical


Passband:	DC~0.812GHz
	0.882~2.4GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.5 max.
Stopband:	0.832~0.862GHz
Stopband Attenuation:	40dB min.
Average Power:	50W max.
Impedance:	50Ω

Mechanical

Size ^{*1} :	221*82*28mm
	8.701*3.228*1.102in
RF Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Outline Drawings

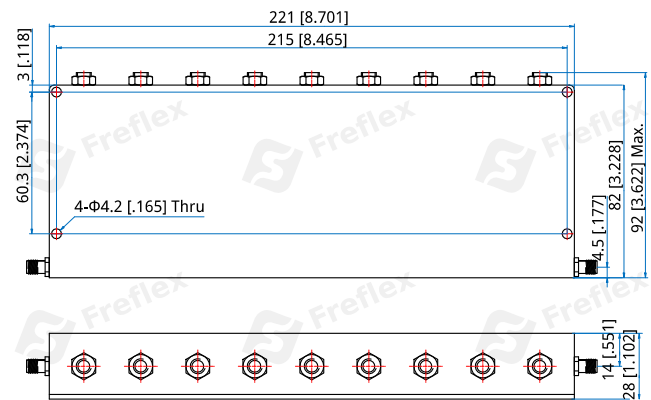

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-832-862-40

Customization is available upon request.