

FRF-832-862-60

0.832~0.862GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~0.812GHz 0.895~2.5GHz
Passband Insertion Loss:	1.5dB max. (at the corner: 2.0dB max.)
Passband VSWR:	1.5 max. @DC~0.812GHz, 0.895 ~2.3GHz 1.7 max. @2.3~2.5GHz
Stopband:	0.832~0.862GHz
Stopband Attenuation:	60dB min.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	265*77*28mm 10.433*3.031*1.102in
RF Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+40°C
--------------	---------

Outline Drawings

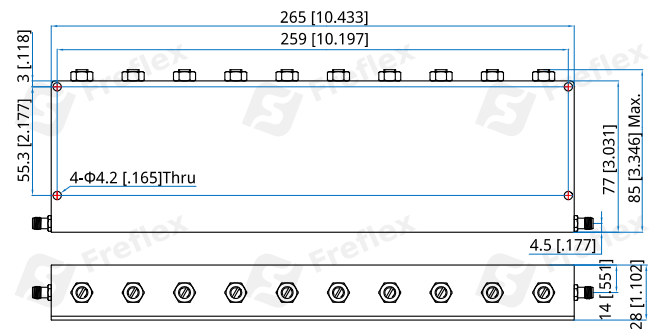

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-832-862-60

Customization is available upon request.