

## FRF-880-915-30

### 0.88~0.915GHz, 30dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	DC~0.870GHz 0.925~2.5GHz
Passband Insertion Loss:	1.5dB max. @DC~860MHz&935~2500MHz 2dB max. @860~870MHz&925~935MHz
Passband VSWR:	1.5 max.
Stopband:	0.88~0.915GHz
Stopband Attenuation:	30dB min.
Average Power:	20W max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	265*90*28mm 10.433*3.543*1.102in
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

### Environmental

Temperature:	-10~+50°C
--------------	-----------

### Outline Drawings

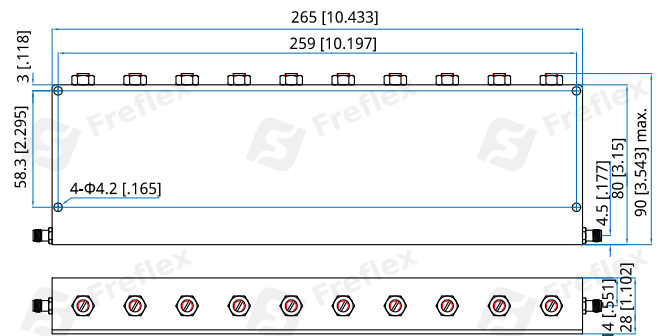

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

### How To Order

**FRF-880-915-30**

Customization is available upon request.