

FRF-935-941-50

935~941MHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~0.89GHz 0.986~2.8GHz
Passband Insertion Loss:	1.2dB max.
Passband VSWR:	1.5 max.
Stopband:	935~941MHz
Stopband Attenuation:	50dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	213*85*28mm 8.386*3.346*1.102in
Weight:	670g
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings

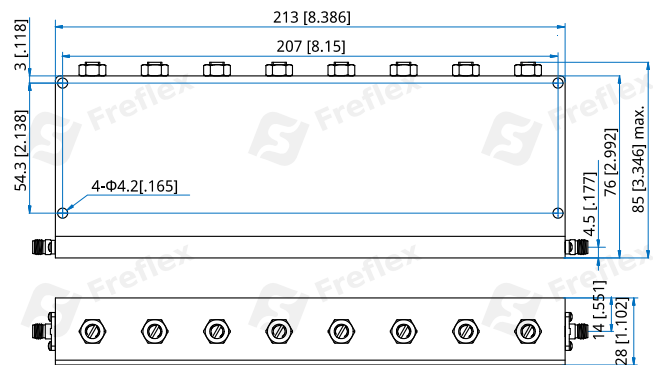

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-935-941-50

Customization is available upon request.