

FBT-0.3-110000

0.3MHz~110GHz

Features:

- * Broadband
- * Small Size

Applications:

- * Telecom
- * Satcom
- * Laboratory Test
- * Instrumentation


Electrical

Frequency:	0.3MHz~110GHz
Insertion Loss	3.5dB max.
VSWR:	2.3 max.
Voltage:	-16~16V
Current:	400mA max.
Inductance:	220uH typ.
DC Isolation:	20dB min.
DC Impedance:	3.2Ω typ.

Mechanical

Size:	31.8*51.4*13mm
	1.252*2.024*0.512in
DC Connectors:	SMA Female
RF Connectors:	1.0mm Female, 1.0mm Male
RF/DC Connectors:	1.0mm Female, 1.0mm Male
Mounting:	2-Φ2.2mm through-hole

Outline Drawings

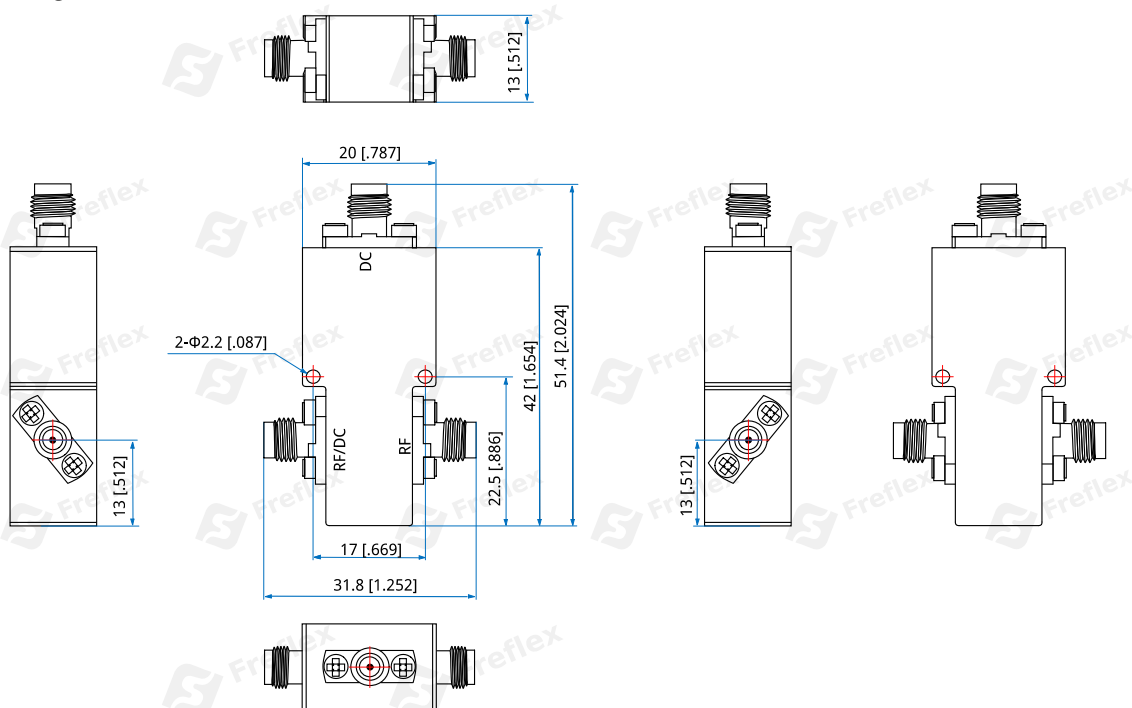

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBT-0.3-110000-1-05 - 1.0mm (f) - 1.0mm (f), DC in SMA (f)

FBT-0.3-110000-1-08 - 1.0mm (f) - 1.0mm (m), DC in SMA (f)

FBT-0.3-110000-1-11 - 1.0mm (m) - 1.0mm (m), DC in SMA (f)

FBT-0.3-110000-1-12 - 1.0mm (m) - 1.0mm (f), DC in SMA (f)

Customization is available upon request.