

FBT-10-40000

0.01~40GHz

Features:

- * Broadband
- * Small Size

Applications:

- * Telecom
- * Satcom
- * Laboratory Test
- * Instrumentation

Electrical

Frequency Range:	0.01~40GHz
Insertion Loss:	2.2dB max.
Isolation:	30dB typ.
VSWR:	2 max.
Voltage:	25V max.
Current:	0.5A max.
Handing Power:	10W max.

Mechanical

Size^{*1}: 16*12*10mm
0.63*0.472*0.394in

DC Connectors: Solder Pin

RF&DC Connectors: 2.92mm Female


[1] Exclude connectors.

Environmental

Operating Temperature: -55~+105°C

Non-operating Temperature: -55~+125°C

Outline Drawings

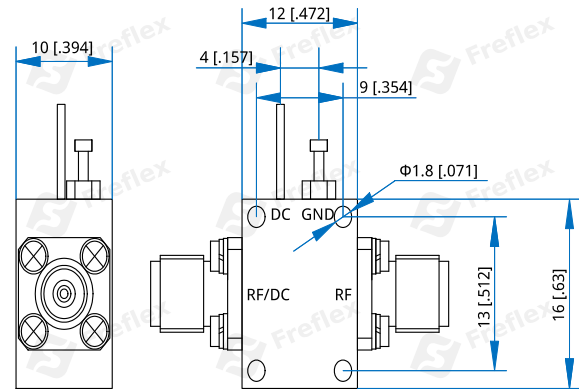

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBT-10-40000

Customization is available upon request.